

ULTRALITE S1 FLEX ZERO

One-component, high-performance, deformable, lightweight, cementitious adhesive for ceramic and stone tiles with no vertical slip and extended open time. Extremely high yield, with very low VOC and fully offset greenhouse gas emissions. Ideal for large-format tiles.



BENEFITS AND FEATURES

- Easier to apply and transport
- Very high yield
- Excellent back-buttering capacity
- Ideal for installing large formats
- Deformable
- High thixotropy
- Very low emission of VOC
- Residual Greenhouse Gas emissions fully offset through the acquisition of certified environmental credits

CO₂ FULLY OFFSET PRODUCTS

UltraLite S1 Flex Zero is part of the CO₂ Fully Offset in the Entire Life Cycle line of products. CO₂ emissions measured throughout the life cycle of products from the Zero line in 2024 using Life Cycle Assessment (LCA) methodology, verified and certified with EPDs, have been offset through the acquisition of certified carbon credits in support of forestry protection projects. A commitment to the planet, to people and to biodiversity. For more details on how emissions are calculated and on climate mitigation projects financed through certified carbon credits, visit the webpage zero.mapei.com.au

CLASSIFICATION ACCORDING TO AS ISO 13007.1

UltraLite S1 Flex Zero is a C2TES1-class cementitious (C), improved (2), slip-resistant (T), extended open time (E), deformable (S1) adhesive.

The conformity of UltraLite S1 Flex Zero is declared in TT certificates no. 21/32301609 for the grey version and no. 21/32301610 for the white one, issued by the APPLUS, LGAI Technological Center Bellaterra (Spain).

WHERE TO USE

- Bonding all types and sizes of ceramic tiles (double-fired, single-fired, porcelain, clinker, terracotta, etc.) on interior and exterior substrates.
- Bonding all types of mosaic on interior and exterior surfaces, also in swimming pools.
- Bonding stone tiles on interior and exterior surfaces (as long as the stone material is not sensitive to moisture and staining).
- Bonding large format porcelain tiles, also thin porcelain tiles on floors, specifically on large surface areas: due to the high back-buttering capacity, the formation of voids between the substrate and the tile is limited.
- Bonding on interior and exterior walls, including exterior facades.

Some application examples

- Bonding ceramic tiles (porcelain, clinker, double-fired, single-fired, etc.), ceramic and glass mosaic, stone tiles (as long as not sensitive to moisture) and thin and large format porcelain tiles on the following substrates:
 - self-levelling compounds and screeds (including heated);
 - precast concrete walls (free of release agent residues);
 - stable and cured concrete floors;
 - cementitious render and lime-mortar render;
 - gypsum-based render (after the application of an acrylic primer such as **Primer G** or **Eco Prim T Plus**);
 - plasterboard, walls made of fibre cement panels, precast wall panels;
 - **Mapeguard Board**, multi-purpose construction panels;
 - **Mapelastic Smart**, **Mapelastic AquaDefense Zero**, **Aquaflex WPU**, or **Mapegum WPS** waterproofing membranes;
 - waterproofing and uncoupling, anti-fracture, membranes from the **Mapeguard** range.
- Installing existing floors (ceramic, marble, etc.) and after priming with **Eco Prim Grip**.
- Installing tiles on marine plywood, particleboard, existing wooden floors (as long as they are stable) and after priming with **Eco Prim Grip**.
- Installing ceramic and natural stone tiles in balconies, terraces, flat roofs subject to direct sunlight and or temperature swings.
- Installing tiles in swimming pools and tanks.

TECHNICAL CHARACTERISTICS

Ultralite S1 Flex Zero is a grey or white powder made of cement, selected graded sand and a high amount of synthetic resins, admixed with lightweight, natural aggregates that make the mix lighter, according to a special formula developed in MAPEI Research & Development labs.

The environmental impacts during the entire life cycle of **Ultralite S1 Flex Zero** have been assessed through the LCA (Life Cycle Assessment) methodology and reported in EPD n°S-P-09432 (Environmental Product Declaration) in accordance with ISO 14025 standard, certified and published by The International EPD System.

Ultralite S1 Flex Zero is a product with very low content and emission of volatile organic compounds (VOC), which safeguards the health and safety of installers and final users. It is certified as EC1 Plus by the German association GEV.

Ultralite S1 Flex Zero helps earn important Green Star and LEED credits.


Ultralite S1 Flex Zero offers the following advantages:

- The special formulation used to manufacture **Ultralite S1 Flex Zero** gives it a low density, a characteristic which offers two main advantages:
 1. bags of **Ultralite S1 Flex Zero** have the same volume but weigh less (13.5 kg) than bags of conventional cementitious adhesive (20 kg). This means less effort for the workers, as the bags are easier to handle on the construction site and storage warehouses. Furthermore, lightweight leads to clear benefits in terms of reduced transport costs: indeed, one pallet of **Ultralite S1 Flex Zero** weighs 750 kg while one pallet of conventional adhesive weighs 1250 kg.
 2. higher yield: each 13.5 kg bag of **Ultralite S1 Flex Zero** has approximately the same yield (in terms of square metres of tiles installed with the same type of trowel, installation technique and substrate) as that of 20 kg bags of conventional MAPEI cementitious adhesives.

- **Ultralite S1 Flex Zero** has a low viscosity, which makes application quicker and easier. Despite the above characteristics, the thixotropic nature of **Ultralite S1 Flex Zero** means there is no vertical slip when installing tiles on walls, even with large-format tiles.
- Its excellent back-buttering properties and thixotropic consistency make **Ultralite S1 Flex Zero** particularly suitable for laying thin porcelain tiles. The application of **Ultralite S1 Flex Zero** using the back-buttering technique on flat substrates ensures that there are absolutely no voids in the adhesive on the back of the tiles, thus avoiding the risk of fracture when in service.
- Its excellent non-slip properties also make it particularly easy and safe to install tiles on vertical surfaces.

When mixed with water, **Ultralite S1 Flex Zero** forms a mortar with the following characteristics:

- excellent capacity of absorbing deformation in the substrate and tiles; S1-classified adhesive: transversal deformability >2.5 mm measured in compliance with the test method described in AS ISO 13007 standard;

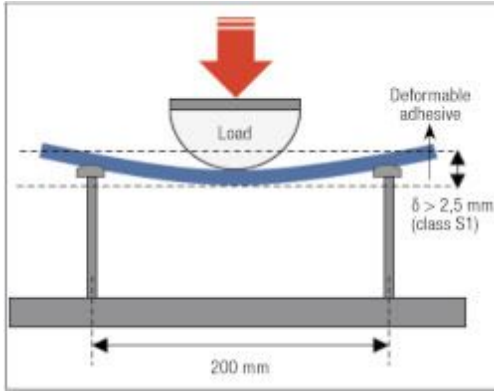

- excellent back-buttering properties;
- perfect bond to all materials normally used in the building industry;
- particularly extended adjustment and open time to make installation easier.

RECOMMENDATIONS

Do not use **Ultralite S1 Flex Zero** in the following cases:

- on concrete that has not been thoroughly cured;
- on metal, rubber, PVC and linoleum substrates.
- for slabs of marble and natural stone subject to efflorescence or staining.
- for natural or agglomerate stone subject to moisture expansion.
- when the floor surface must be set to foot traffic quickly.
- once the mix has started to set. Do not add more water.

APPLICATION PROCEDURE

Preparation of the substrate

The substrate must be sound, sufficiently dry, free of loose parts, grease, oil, paint and wax.

Cementitious substrates must not shrink after the installation of the tiles. Therefore, in good weather, render must be cured for at least one week per cm of thickness, and cementitious screeds must be dried for at least 14 days, unless they are made using special MAPEI binders for screeds, such as **Mapecem** or **Topcem**, or pre-blended mortars, such as **Mapecem Pronto** or **Topcem Pronto**. If the surface is too hot due to direct sunlight, cool it down with water.

Substrates on which thin porcelain tiles are to be installed must be perfectly flat. Therefore, where necessary, even out the substrate before laying the floor with a MAPEI self-levelling compound.

If the substrate is very absorbent and in case of high temperatures, before applying **Ultralite S1 Flex Zero**, it is recommended to wet the substrate in order to extend the open time of the adhesive.

Preparation of the mix

The amount of water required for each 13.5 kg bag of **Ultralite S1 Flex Zero** powder is:

- Grey adhesive: between 6.8 to 7.0 litres per bag
- White adhesive: between 7.6 to 7.8 litres per bag

Blend **Ultralite S1 Flex Zero** with clean water to obtain a smooth, lump-free mix. Let the mix stand for approximately 5 minutes, then blend again.

The mix has a pot life of approximately 8 hours.

Spreading the mix

Apply **Ultralite S1 Flex Zero** on the substrate using a notched trowel. Use a suitable trowel for a total tile back-buttering.

To guarantee a good bond, apply a thin layer of **Ultralite S1 Flex Zero** on the substrate using the flat side of the trowel and then immediately apply a second layer of **Ultralite S1 Flex** to form the thickness required using a notched trowel suitable for the type and size of tiles to be bonded.

Apply the back-buttering technique by spreading the adhesive on the back of the tiles to ensure complete buttering in the following cases:

- exterior installations;
- installation of large-format ceramic tiles;
- heated floors;
- floors to be polished after laying or subject to heavy loads;
- tiles with a heavily textured backing;
- application in water tanks or swimming pools.

When laying large thin porcelain floor tiles, it is recommended to install the adhesive also on the backs of the tiles (with a suitable notched trowel) to ensure that there are absolutely no voids, thus avoiding the risk of fracture when the floor is in service.

Installation of the tiles

The tiles do not need to be wet before they are installed. However, clean the backs of the tiles by washing with clean water if they are particularly dusty.

When applying the tiles, press down firmly and move the tile perpendicular to the notches to collapse them to guarantee good coverage.

The open time for **Ultralite S1 Flex Zero** is at least 30 minutes under normal temperature and humidity conditions. When environmental conditions are not ideal (direct sunlight, dry wind, high temperatures), or if the substrate is particularly absorbent, open time may be reduced to only a few minutes.

Therefore, constantly check the adhesive to make sure a layer of dry skin does not form on its surface, and that it is still fresh. If a layer of dry skin forms, run the notched trowel over the adhesive again to re-activate open time, or, if the adhesive has already start to set, remove it and spread a new layer of fresh adhesive.

Do not wet the surface of the adhesive if a layer of skin forms: water does not dissolve the skin and creates instead a film that impedes a good bond.

Final adjustment of the tiles must be carried out within 45 minutes of application.

Tiles installed using **Ultralite S1 Flex Zero** must be protected from water and rain for at least 24 hours, and from freezing weather and direct sunlight for at least 5 to 7 days of application.

When installing the tiles, it is recommended to use the levelling systems of **MapeLevel** range to maintain the correct grout size and avoid the formation of unevenness between tile and tile.

Grouting and sealing

Tile joints may be grouted after 4 to 8 hours on walls and after 24 hours on floors. Use a MAPEI cementitious or epoxy grout, available in a wide variety of colours.

Expansion joints must be sealed using a special MAPEI sealant.

If necessary, clean, maintain and protect the surfaces using the specific products from the **UltraCare** range.

SET TO LIGHT FOOT TRAFFIC

The floors are set to light foot traffic after approximately 24 hours.

READY-FOR-USE

Surfaces are ready-for use after approximately 14 days.

Tanks and swimming pools can be filled after waiting at least 21 days.

CLEANING

Clean tools and containers with plenty of water while **Ultralite S1 Flex Zero** is still fresh.

Clean the surfaces of the tiles using a damp cloth before the adhesive hardens.

PACKAGING

Ultralite S1 Flex Zero is available in 13.5 kg paper bags.

CONSUMPTION

0.8 kg/m² per mm of thickness, equal to:

- 1.5 kg/m² for the installation of uncoupling or waterproofing membranes (using a 5 mm notched trowel);
- 2-3.5 kg/m² for the installation of tiles (depending on the type of trowel selected according to the size of the tiles)

STORAGE

Ultralite S1 Flex Zero may be stored for 12 months in its original packaging in a dry area.

SAFETY INSTRUCTIONS FOR PREPARATION AND APPLICATION

Instructions for the safe use of our products can be found on the latest version of the Safety Data Sheet, available from our website www.mapei.com.au

PRODUCT FOR PROFESSIONAL USE.

TECHNICAL DATA (typical values)

In compliance with the following standards:

- European EN 12004 as C2TES1
- AS ISO 13007-1 as C2TES1

PRODUCT IDENTITY

Consistency:	powder
Colour:	grey or white
Bulk density:	870 kg/m ³
Dry solids content:	100%
EMICODE:	EC1 Plus – very low emission

APPLICATION DATA (at +23°C and 50% R.H.)

Mixing ratio:	100 parts of Ultralite S1 Flex with: 50 - 52 of water for Grey 56 - 58 of water for White
Consistency of mix:	creamy
Density of mix:	1200 kg/m ³
pH of mix:	over 12
Pot life of mix:	over 8 hours
Application temperature:	from +5°C to +40°C
Open time:	30 minutes
Adjustment time:	45 minutes
Grouting on walls:	after 4-8 hours
Grouting on floors:	after 24 hours
Set to foot traffic:	24 hours
Ready for use:	14 days

FINAL PERFORMANCE

Bond strength:

- initial (after 28 days):
- after application of heat source:
- after immersion in water:
- after freeze-thaw cycles:

1.8 N/mm²
1.8 N/mm²
1.2 N/mm²
1.5 N/mm²

Resistant to alkalis:

excellent

Resistance to oils:

excellent (poor with vegetable oils)

Resistance to solvents:

excellent

Service temperature:

from -30°C to +90°C

Deformability according to EN 12004:

S1 – deformable (>2.5 mm, <5 mm)

WARNING

Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.

Please refer to the current version of the Technical Data Sheet, available from our website www.mapei.com.au

LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in force at the time of the MAPEI product installation.

The most up-to-date TDS can be downloaded from our website www.mapei.com.au

ANY ALTERATION TO THE WORDING OR REQUIREMENTS CONTAINED OR DERIVED FROM THIS TDS EXCLUDES THE RESPONSIBILITY OF MAPEI.

Mapei Australia Pty Ltd

180 Viking Drive, Wacol, Queensland, 4076



+61 7 3276 5000



www.mapei.com.au



sales@mapei.com.au

2895-6-2024 en-au (AU)

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution

